

TC2B

series



Product Segments


- **Comfort Motion**

General Features

Number of motors	1~3
Max. output	32V DC, 6.25A
Input Voltage	100, 120, 230V AC, or 100~240V AC (SMPS)
Built-in transformer type	SMPS
Plug support	EU, USA, AUS, UK, or JPN
Certificate	EMC
Color	Black or grey
Operational temperature range	+5°C~+45°C
Over current protection	

Drawing

Standard Dimensions
(mm)

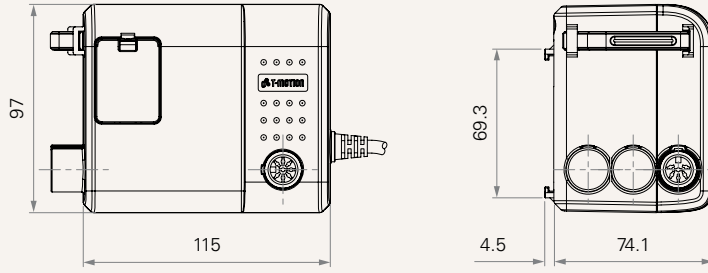

Input voltage	1 = 100V AC	2 = 120V AC	3 = 230V AC	4 = 100~240V AC (SMPS)
Plug	1 = EU 2 = US	3 = AU 4 = UK	5 = JP	
Number of Actuators	1 = 1	2 = 2	3 = 3	
Color	1 = Black	2 = Pantone 428C		
Cable Length (mm)	1 = Straight, 2000	2 = Straight, 4000		
Fixation	1 = On actuator (accessories: fixing screws*1)		2 = On iron frame (accessories: mounting brackets & screws)	
Backup Battery	0 = Without 1 = Without battery, with a connection cable		2 = With 2*9V batteries	
Transformer	4 = SMPS (SPM-58, 2A)			
MCU	0 = Without	1 = With		
Wireless Control	0 = Without	R = RF (315 MHz) For NA	F = RF (433 MHz) For EU	H = IR
IP Rating	1 = Without	2 = IP54		
Grounding	0 = Without	3 = On AC cable		

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.