

# TC8

series



---

## Product Segments

### • Care Motion

---


#### General Features

Number of motors	1~7
Number of controls	1~3
IP rating	IP66
Certificate	IEC60601-1; EN60601-1-2
Color	Black or grey
Operational temperature range	+5°C~+45°C
Includes 3 modules: control unit, power supply, and battery	
T-BUS protocol available; compatible with various accessories of TiMOTION	


**Drawing**

Standard Dimensions  
(mm)


TC8 with TP4 (power supply) and TBB (back-up power)

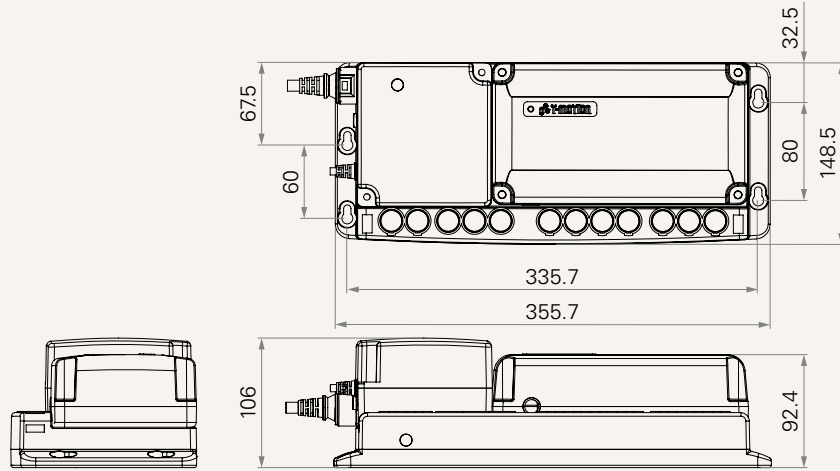

TC8 without TP4 (power supply) and TBB (back-up power)

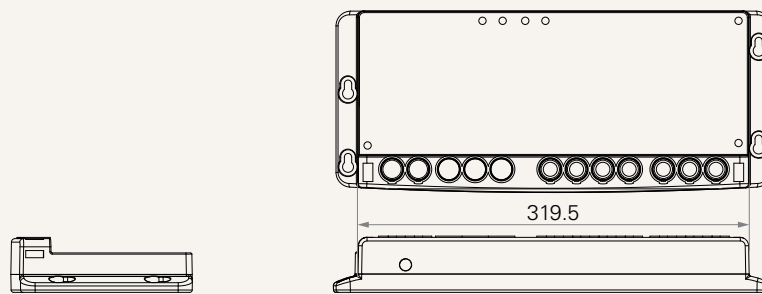

TP4 (power supply) and TBB (back-up power)

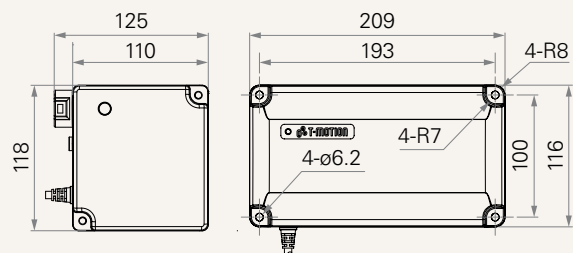


<b>Number of Actuators</b>	1 = 1 2 = 2	3 = 3 4 = 4	5 = 5 6 = 6	7 = 7
<b>Handset Input</b>	1 = 1	2 = 2	3 = 3	
<b>Power Input</b>	0 = Without	1 = With		
<b>Back Up Battery</b>	0 = Without	1 = With (uses a lead-acid battery with charging capability — TBB)		
<b>Color</b>	1 = Black	2 = 428C (LAB)		
<b>IP Rating</b>	1 = Without	2 = IP54	3 = IP66	
<b>Fixed Hole with Brass Nut Insert</b>	1 = With			
<a href="#">See page 4</a>				
<b>24V Stable Output (Max. Support 6 Actuators)</b>	0 = Without	1 = With		

---

## Fixed Hole with Brass Nut Insert

1 = With

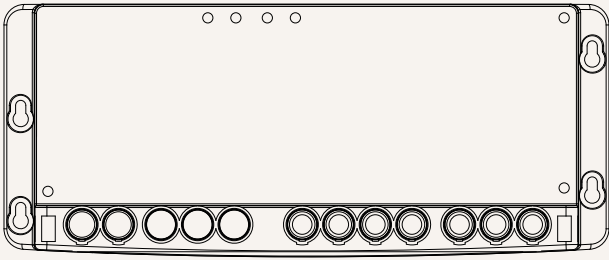

---

## Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.