


# TFL33S

series

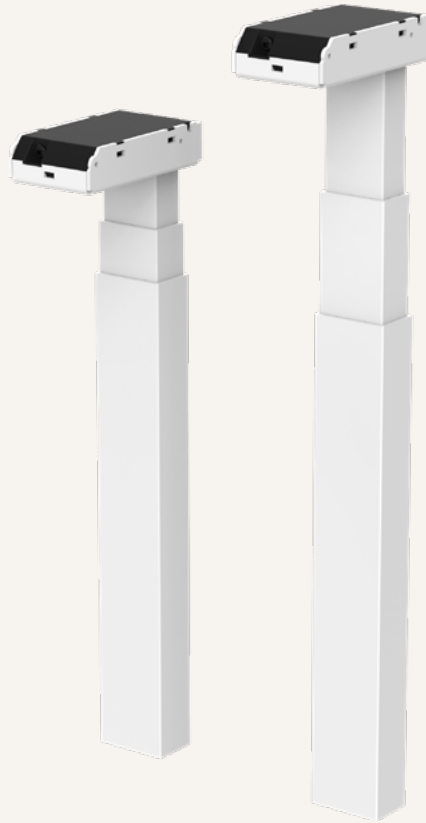


---

## Product Segments

- **Ergo Motion**

---

Introducing TiMOTION's TFL33S, a high-speed lifting column solution designed for diverse ergonomic height-adjustable applications. Experience swift and seamless position adjustments with unparalleled efficiency. Elevate your workspace with a distinctive and effortless user experience.

Combine multiple TFL33S lifting columns with the TC control box series to create tailored solutions that precisely match specific project requirements. Providing synchronized movement that is swift, seamless, and quiet, the TFL33S delivers a superior lifting experience.




### Note

- 1 FastRise high-speed column for quick height adjustment
- 2 A three-stage telescopic structure and rectangular profile

### Features

- Load and speed per column<sup>12</sup>

Code	Load (N) Push	Self Locking Force (N)	Current (A) with 24V DC		Speed (mm/s) with 24V DC	
			No Load	With Load	No Load	With Load
F	600	600	5.0	9.0	75.0	55.0

- Retracted length      590mm  
560mm (M)  
520mm (S)
- Stroke                    650mm  
660mm (M/S)
- Outer profile            83\*53mm rectangular
- Stages                    3-stage
- Output signals         Hall sensor\*2
- Voltage                   24V DC
- Color<sup>3</sup>                     RAL9005     RAL9006     RAL9016     RAL9022
- Product weight         7.4kg / column


### Note

- <sup>1</sup> The self locking force, current, and speed performance are tested with TiMOTION control boxes.
- <sup>2</sup> The parameters are based on average test values; final specifications are subject to the approval drawings.
- <sup>3</sup> For more color options, please consult your sales representative.

**Performance Data with Control Box**

The following is the performance data of two columns driven by an Ergo Motion control box TC15F. The load is evenly distributed on the work surface.<sup>4</sup>

- TFL33S, two columns driven by TC15F

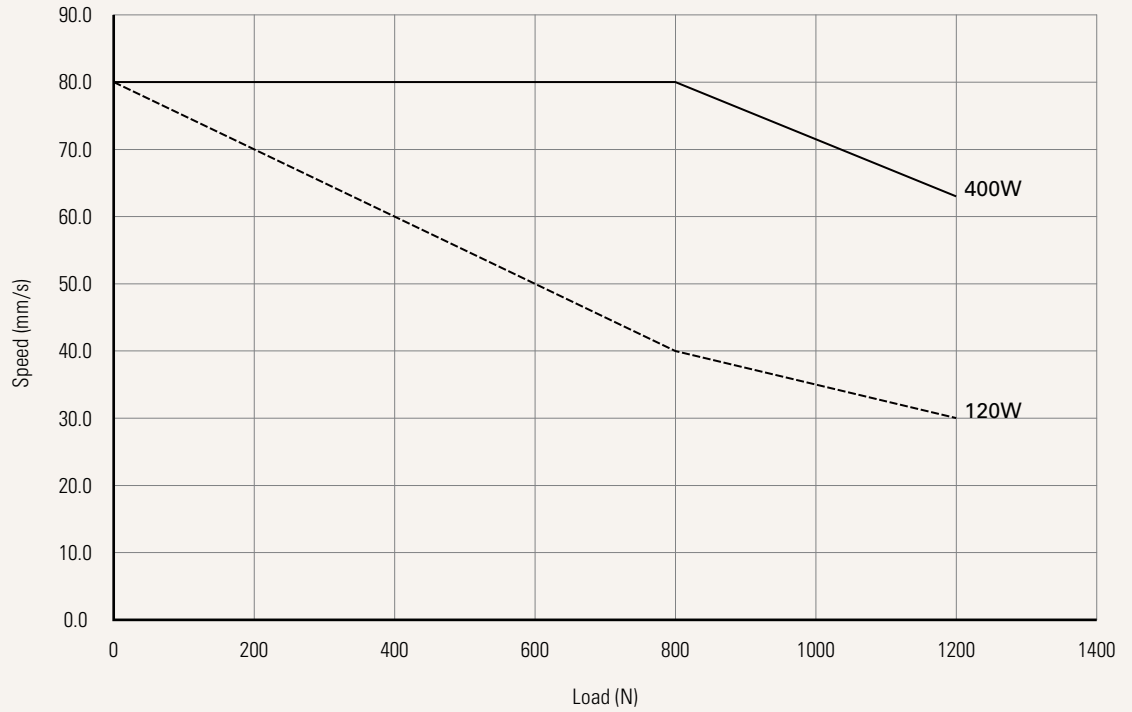


TC15F Spec	Load (N)	Constant Speed (mm/s) with TC15F
<b>120W</b>	1200	40
<b>400W</b>	1200	80

**Note**

<sup>4</sup> The corresponding control box software is required.

**Drawing**

Standard Dimensions  
(mm)

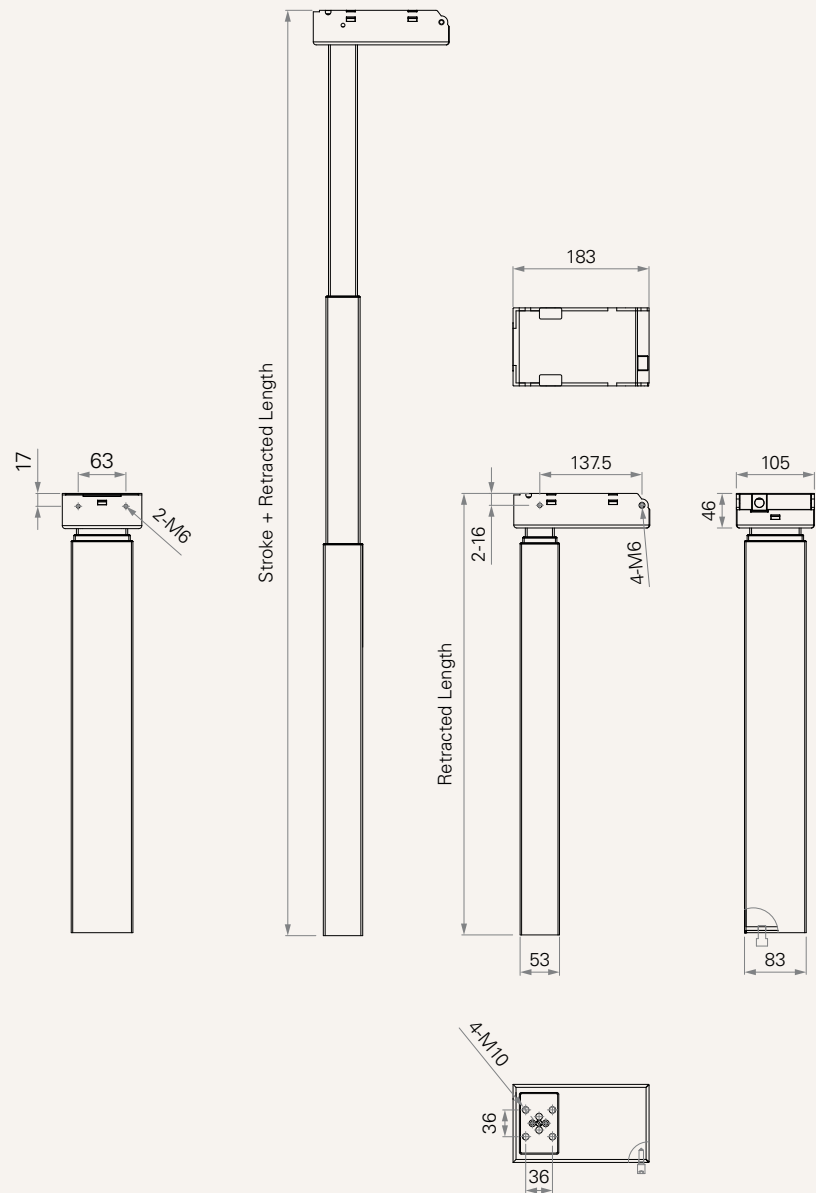

**Stroke & Retracted Length**

Options	Stroke (mm)	Retracted Length (mm)
Standard	650	590
<b>M</b>	660	560
<b>S</b>	660	520


<b>Appearance of Motor House</b>	C = TiMOTION standard			
<b>Voltage</b>	2 = 24V DC			
<b>Load and Speed</b>	<a href="#">See page 2</a>			
<b>Stroke &amp; Retracted Length (mm)</b>	<a href="#">See page 4</a>			
<b>Color</b>	1 = Black, RAL 9005	2 = White, RAL 9016	3 = Grey, RAL 9006	4 = Special grey, RAL 9022
<b>Wiper Color</b>	1 = Black	2 = White	3 = Grey	4 = Matte black
<b>Bracket</b>	0 = Without			
<b>Bottom Plate Type</b>	1 = M10, 36*36, TiMOTION standard		2 = M6, 36*36, TiMOTION standard	
	<a href="#">See page 6</a>			
<b>Bottom Plate Height</b>	1 = Standard		2 = Extended outer tube for shoe	
<b>Output Signals</b>	2 = Hall sensor * 2		S = Pressure sensor + Hall sensor * 2	
<b>Connector</b>	1 = DIN 6P, 90° plug E = Molex 8P, 180° plug, standard		F = Molex 8P, 90°plug, without anti-clip, for TC22/TC23	
<b>Cable Length (mm)</b>	1 = Straight, 500	3 = Straight, 1000	4 = Straight, 1500	

### Note

<sup>1</sup> The TL is designed especially for push applications, not suitable for pull applications.

## Appearance of Motor House


C = TiMOTION standard

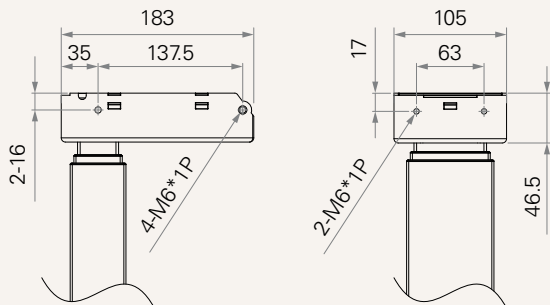

## Bottom Plate Type (mm)


1 = M10, 36\*36, TiMOTION standard

2 = M6, 36\*36, TiMOTION standard

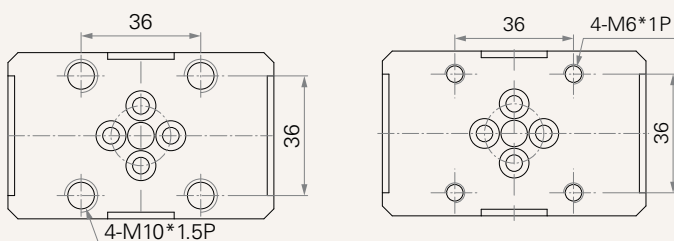

## Package

Package of one TL part number

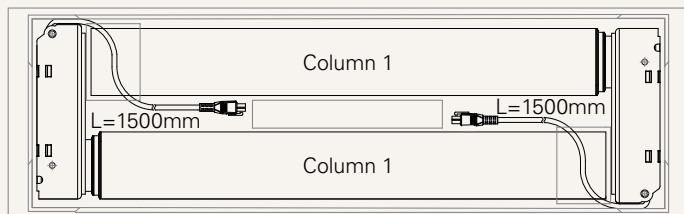


Column: 2pcs TL/box (Same PN& cable length)

Electronic control system: Without

Weight with package: 16KG

Package of two TL part numbers in pairs

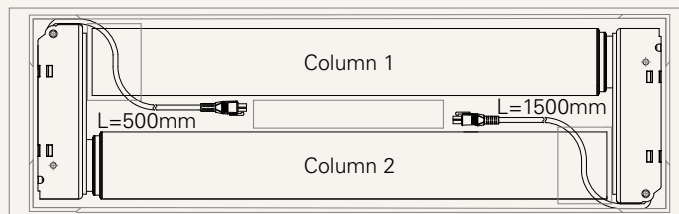


Column: 2pcs TL/box (Different PN, cable length, for pair use)

Electronic control system: Without

Weight with package: 16KG

Package of MP part number set-TL in pairs + electronic control system

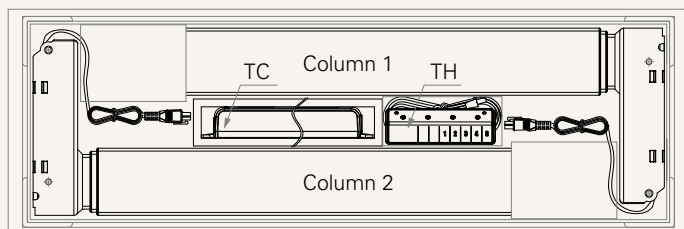

Column: 2pcs TL/box (Different PN, cable length, for pair use)

Electronic control system: TC + TH

Weight with package: 17KG

## Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.