

TH10

series



Product Segments


• Care Motion

General Features

Number of motors	1~4
Max. available buttons	10
Color	Black, grey
IP rating	IP66W
Options	Back light
Safety key	Available
Operational temperature range	+5°C~+45°C


Drawing

Standard Dimensions
(mm)

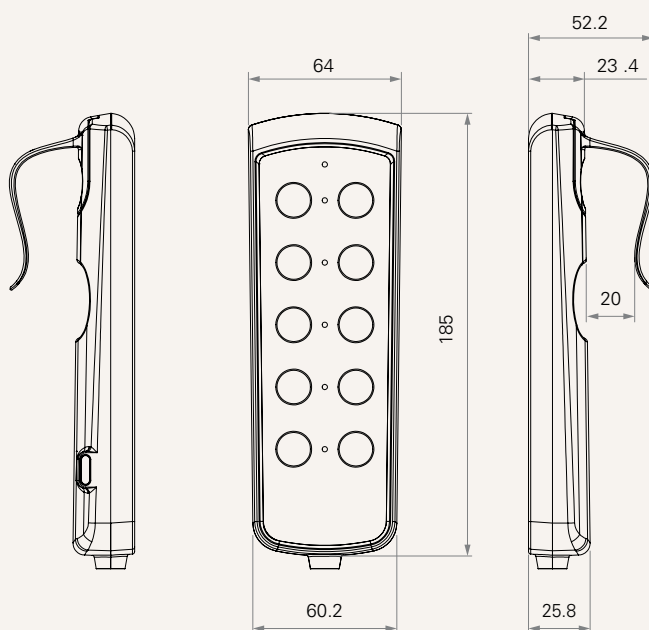

Back Light	A = Without	B = With		
Number of Actuators	1 = 1	2 = 2	3 = 3	4 = 4
Plug	2 = RJ 10P, 90° Plug	5 = RJ 10P, 180° Plug		
Color	1 = Black	2 = Pantone 428C		
IP Rating	1 = Without	2 = IP54	3 = IP66	4 = IP66W
Safety Key	0 = Without	1 = With		
Key Definition	Please contact TiMOTION before making an order			
Cable Length (mm)	See page 4			
MCU	0 = Without MCU + without MCU control box (max. 4 motors) 1 = Without MCU + with MCU control box 2 = With MCU + without MCU control box (max. 4 motors) 3 = With MCU + with MCU control box			
Hook Type	0 = Without (P/N: 32905-227) 1 = Standard (P/N: 32905-100)		2 = Square (P/N: 32905-130)	

Cable Length

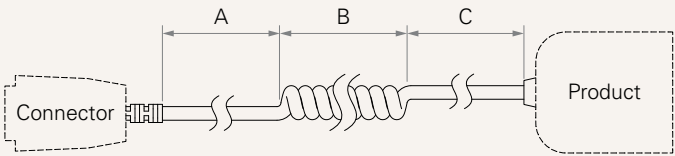

Cable Section (mm)			
CODE	A	B	C
1	1000	300	200
2	1200	300	300
3	1400	300	400
4	2400	0	0
5	100	600	100
6	1000	200	200

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.