

TH6

series



Product Segments


• **Comfort Motion**

General Features

Number of motors	1~2
Max. available buttons	4
Color	Black, grey
Options	Hook
Safety key	Available
Direct cut support	Available
Operational temperature range	+5°C~+45°C


Drawing

Standard Dimensions
(mm)

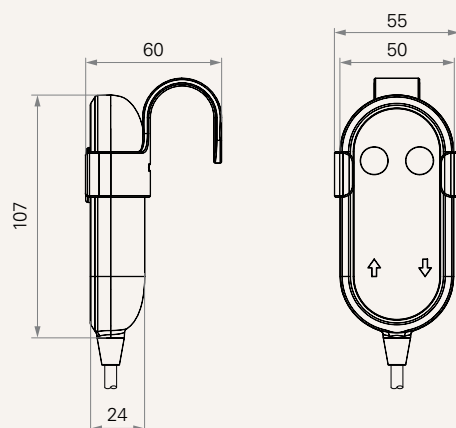

Number of Actuators	1 = 1	2 = 2
Plug	1 = DIN 5P, 90° plug 2 = DIN 8P, for TC2 / TC3 / TC7 3 = Short DIN 5P, 90° plug	4 = DIN 8P, 180°, for extension cable 5 = RJ 10P, 180°, for TC6 / TC9 / extension cable
Color	1 = Black	2 = Pantone 428C
Safety Key	0 = Without	1 = With
Button Definition	Note: please contact TiMOTION before making an order	
Cable Length (mm)	1 = Straight, 1500	7 = Curly, A:1000; B:200; C:200
	See page 4	
MCU	0 = Without	
Control Box Type	0 = Without MCU control box 1 = With MCU control box	2 = Without
Communication Type	1 = Direct Cut 2 = Switch type	3 = Single-direction scan type 4 = Duel-direction scan type
Hook Type	0 = Without	1 = Standard

Cable Length

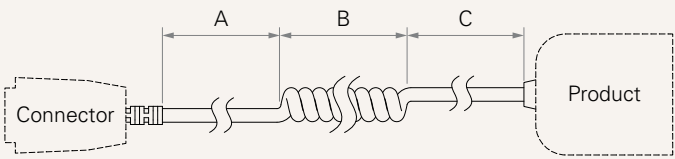

Cable Section (mm)			
CODE	A	B	C
2	1500	0	0
7	1000	200	200

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.