

# TL3

series



## Product Segments

- **Care Motion**
- **Comfort Motion**
- **Ergo Motion**
- **Industrial Motion**


The TL3 columns from TiMOTION are made up of three extruded aluminum tubes of rectangular shape that give the system great stability and a high stroke with reduced retracted length. This electric lifting column allows for an easy integration into many height adjustable workstation applications, such as an exam chair in healthcare industry.

### General Features

Max. load	4,000N (push)
Self-locking force	4,000N
Max. dynamic bending moment	1,000Nm
Max. static bending moment	2,000Nm
Max. speed at max. load	13.7mm/s
Max. speed at no load	45mm/s
Retracted length	$\geq \text{Stroke}/2 + 150\text{mm}$
IP rating	IPX6
Dimension of outer tube	177.4*150.7mm rectangular
Stages	3-stage
Stroke	250~1200mm
Certificate	IEC60601-1, EMC
Output signals	POT, Hall sensors
Options	Direct cut system
Voltage	12V DC; 24V DC (thermal control)
Color	Black, matte silver
Operational temperature range	+5°C~+45°C

## Drawing

Standard Dimensions  
(mm)

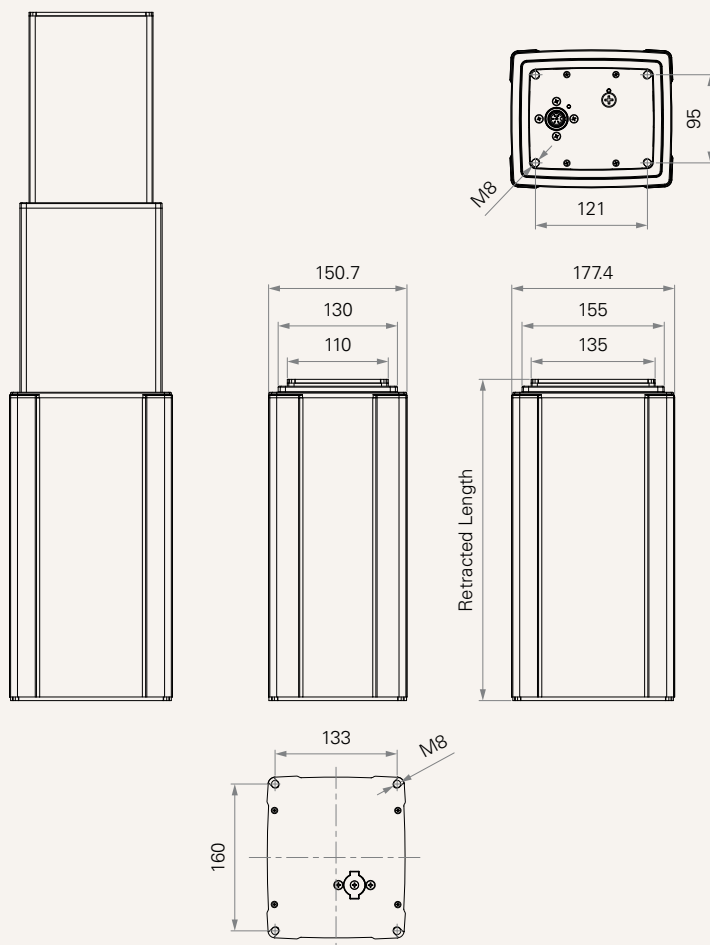

## Load and Speed


CODE	Load (N)	Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push		No Load 32V DC	With Load 24V DC	No Load 32V DC	With Load 24V DC
Motor Speed (2200RPM, duty cycle 10%)						
B	4000	4000	2.5	5.0	14.5	7.6
C	2000	2000	2.5	4.0	22.0	13.0
D	1000	1000	2.5	3.5	39.0	24.0
Motor Speed (2800RPM, duty cycle 10%)						
E	4000	4000	3.5	6.0	18.5	9.4
F	2000	2000	3.5	6.4	35.0	20.0
Motor Speed (3800RPM, duty cycle 10%)						
G	4000	4000	4.0	10.4	28.0	13.7
H	2000	2000	2.5	7.2	45.0	25.0

## Note

- Parameters above are from tested average, please refer to approval drawing for final value.
- The current & speed in table are tested with 24V DC motor. With a 12V DC motor, the current is approximately twice the current measured in 24V DC; speed will be similar for both voltages.
- This self-locking force level is reached only when a short circuit is applied on the terminals of the motor. All the TiMOTION control boxes have this feature built-in.
- Bending moment Y direction =  $X \times 0.8$
- Static bending moment = dynamic  $\times 2$

## Dynamic bending moment (Nm)- X direction

Stroke (mm)	S/2+150	S/2+220
<b>100-300</b>	700	1000
<b>301-500</b>	500	800
<b>501-700</b>	300	500
<b>701-1200</b>	200	200




← Bending moment X

↑ Bending moment Y


## Performance Data (24V DC Motor)

Motor Speed (2200RPM, Duty cycle 10%)

Speed vs. Load

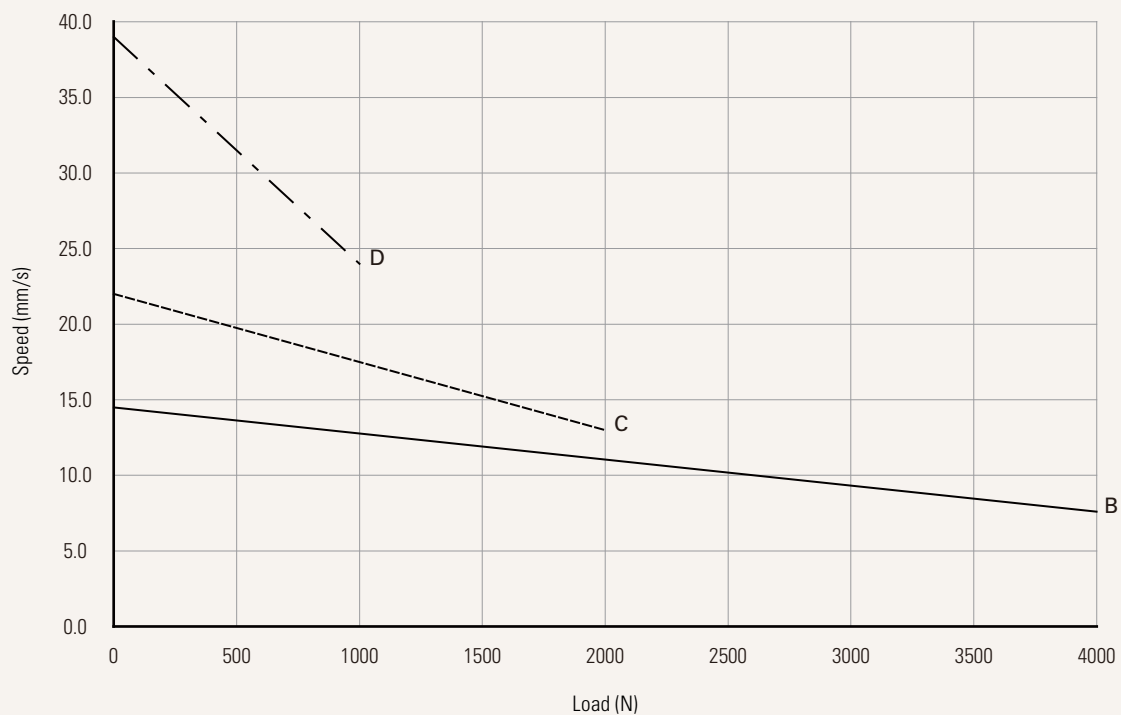


Current vs. Load

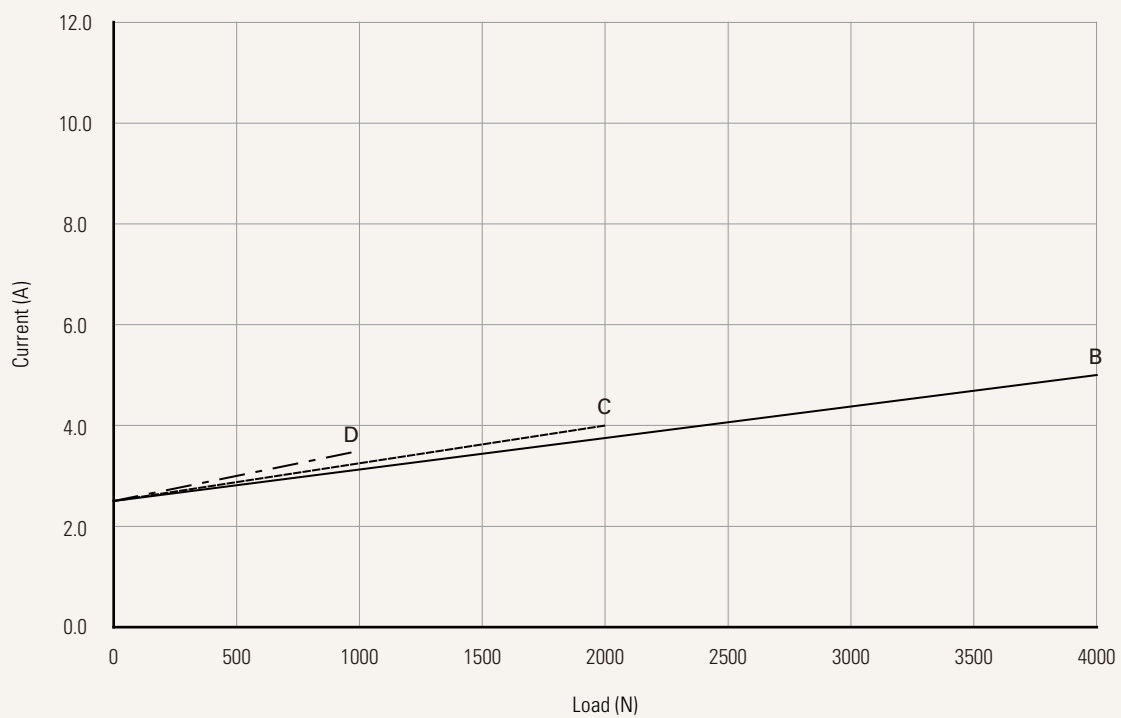


## Performance Data (24V DC Motor)

Motor Speed (2800RPM, Duty cycle 10%)

Speed vs. Load

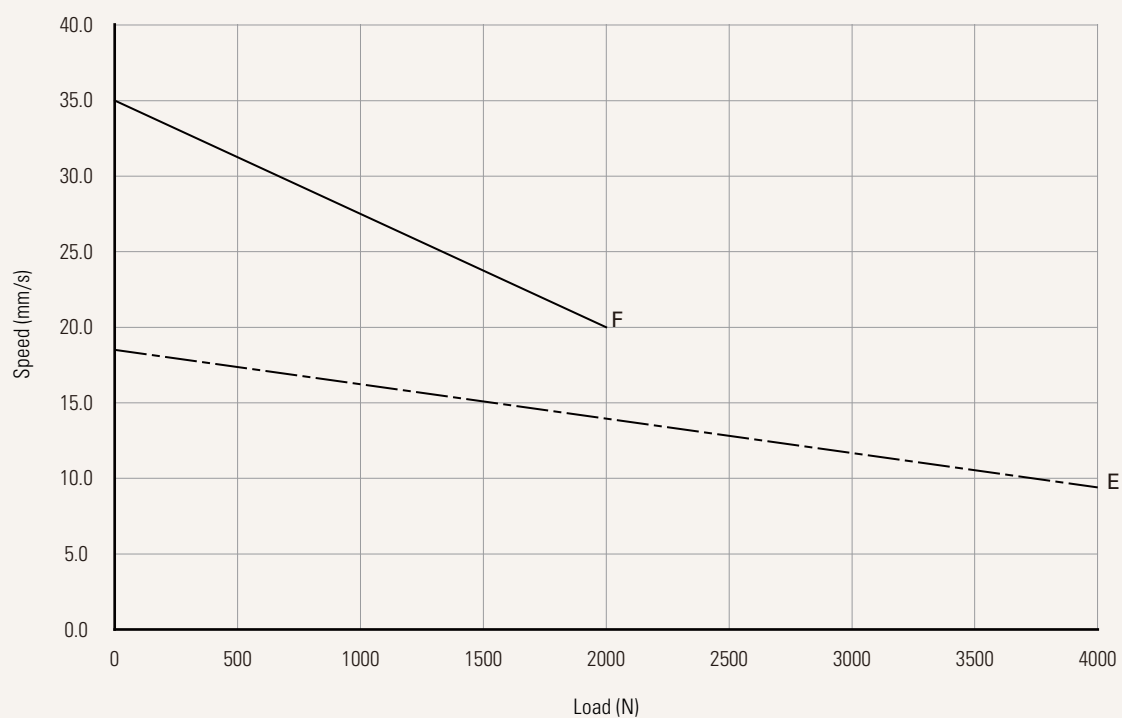


Current vs. Load

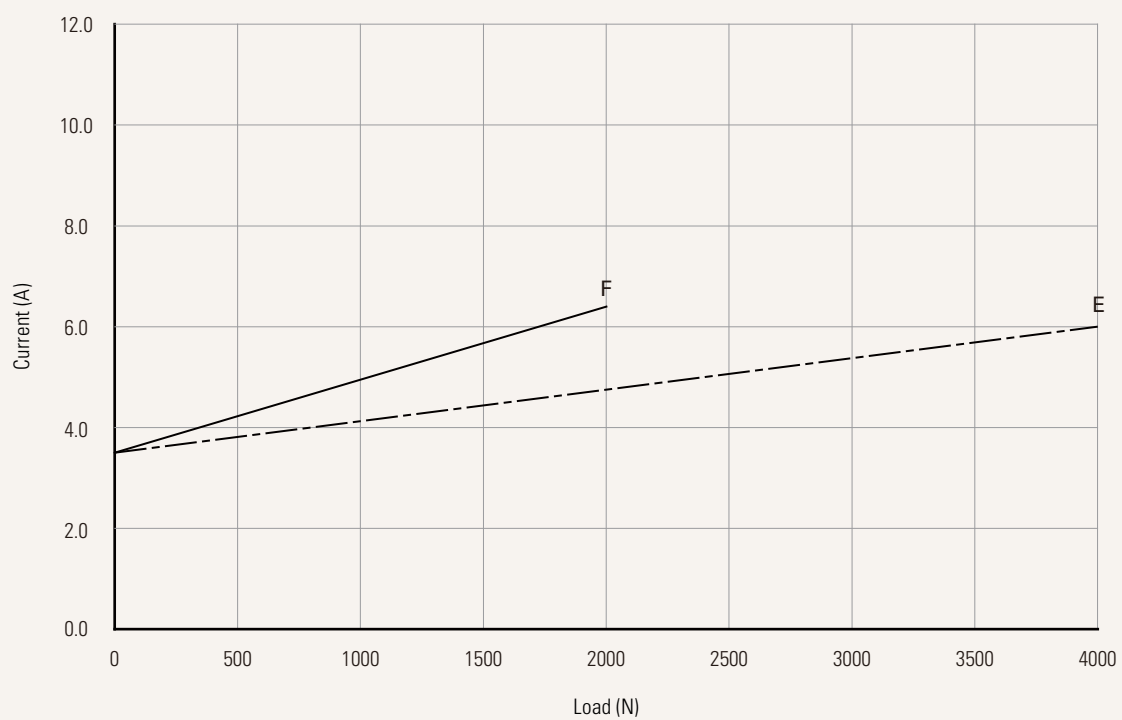


## Performance Data (24V DC Motor)

Motor Speed (3800RPM, Duty cycle 10%)

Speed vs. Load

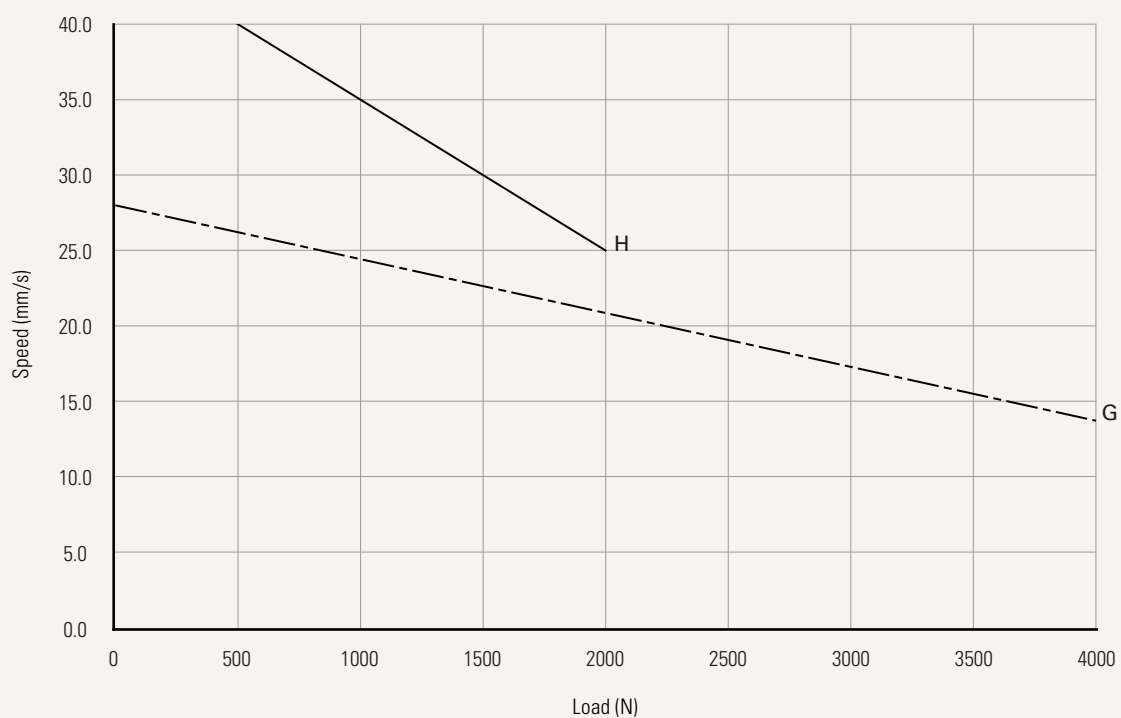

Current vs. Load

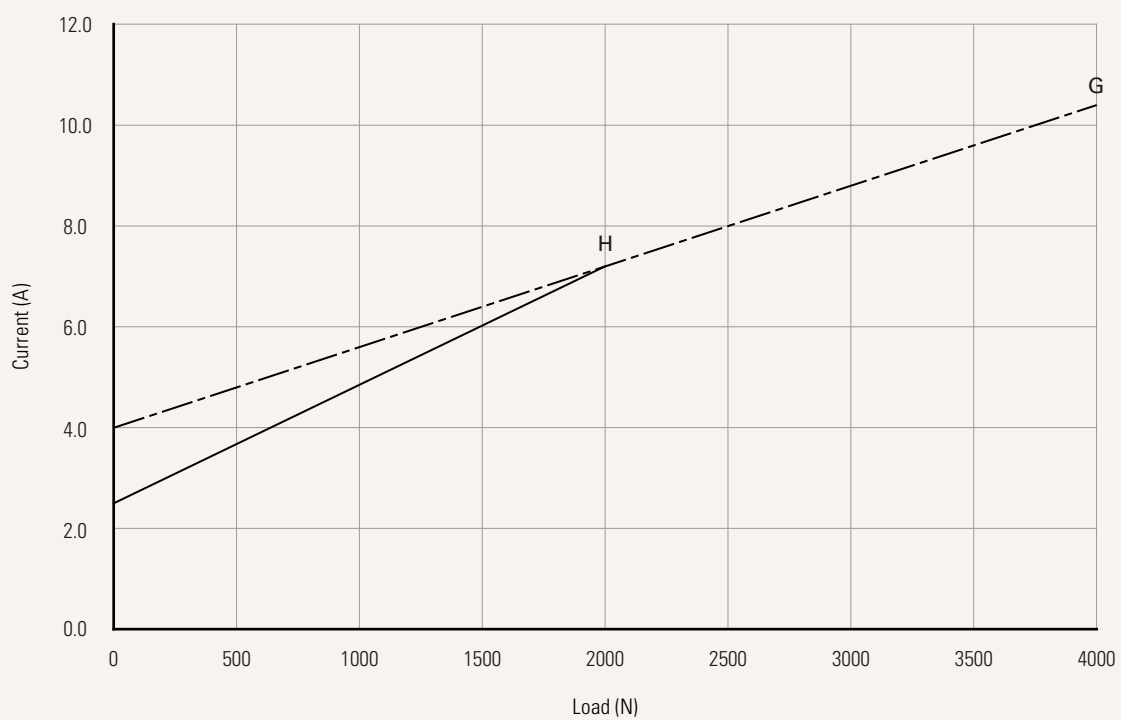

# TL3 Ordering Key - Top End Socket

## TL3

Version: 20240906-Z

<b>Voltage</b>	1 = 12V DC	5 = 24V DC, thermal control
<b>Load and Speed</b>	<a href="#">See page 3</a>	
<b>Stroke (mm)</b>	250~1200	
<b>Retracted Length (mm)</b>	<a href="#">See page 10</a>	
<b>Cable Exit</b> <a href="#">See page 10</a>	1 = Top end socket	
<b>Special Functions for Spindle Sub-assembly</b>	0 = Without (Standard)	1 = Safety nut
<b>Functions for Limit Switches</b> <a href="#">See page 11</a>	1 = Two switches at full retracted / extended positions to cut current 3 = Two switches at full retracted / extended positions to send signal	
<b>IP Rating</b>	1 = Without	2 = IPX4 3 = IPX6
<b>Output Signals</b>	0 = Without	2 = Hall sensors * 2 3 = POT
<b>Connector</b> <a href="#">See page 11</a>	1 = DIN 6P, socket	2 = DIN 6P, socket, with Anti-pull buckle
<b>Cable Length (mm)</b>	0 = Without (The corresponding extension cable TEC needs to be ordered seperately*) Note: please contact TiMOTION before making an order	
<b>Color</b>	1 = Black	2 = Matte silver
<b>Tubes Direction</b> <a href="#">See page 12</a>	0 = Thinner on top	
<b>Grounding Function</b>	0 = Without	1 = With

### Note

1 The TL3 is designed especially for push applications, not suitable for pull applications.

# TL3 Ordering Key - Side Cable

TL3

Version: 20240906-Z

<b>Voltage</b>	1 = 12V DC	5 = 24V DC, thermal control		
<b>Load and Speed</b>	<a href="#">See page 3</a>			
<b>Stroke (mm)</b>	250~1200			
<b>Retracted Length (mm)</b>	<a href="#">See page 10</a>			
<b>Cable Exit</b> <a href="#">See page 10</a>	2 = Bottom side cable	3 = Top side cable	4 = Top (to TC) + Bottom (to TH) side cable	
<b>Special Functions for Spindle Sub-assembly</b>	0 = Without (Standard)	1 = Safety nut		
<b>Functions for Limit Switches</b> <a href="#">See page 11</a>	1 = Two switches at full retracted / extended positions to cut current 3 = Two switches at full retracted / extended positions to send signal			
<b>IP Rating</b>	1 = Without	2 = IPX4	3 = IPX6	
<b>Output Signals</b>	0 = Without	2 = Hall sensors * 2	3 = POT	
<b>Connector</b> <a href="#">See page 11</a>	1 = DIN 6P, 90° plug 2 = Tinned leads	3 = Molex 6P, 90° plug F = DIN 6P, 180° plug	G = Molex 8P 90° plug H = Molex 8P 180° plug	
<b>Cable Length (mm)</b>	1 = Straight, 500 2 = Straight, 750	3 = Straight, 1000 4 = Straight, 1250	5 = Straight, 1500 6 = Straight, 1750	7 = Straight, 2000
<b>Color</b>	1 = Black (Black cable set) 2 = Silver (428C color cable set)		3 = Silver (Black cable set)	
<b>Tubes Direction</b> <a href="#">See page 12</a>	0 = Thinner on top		1 = Wider on top	
	Note: If "top+bottom cable" in Cable Exit section is selected , could only select #0			
<b>Grounding Function</b>	0 = Without	1 = With		

## Note

1 The TL3 is designed especially for push applications, not suitable for pull applications.



# TL3 Ordering Key - Direct Cut

TL3

Version: 20240906-Z

<b>Voltage</b>	5 = 24V DC, thermal protector		
<b>Load and Speed</b>	<a href="#">See page 3</a>		
<b>Stroke (mm)</b>	100~1200		
<b>Retracted Length (mm)</b>	<a href="#">See page 10</a>		
<b>Cable Exit</b> <a href="#">See page 10</a>	B = Top side - for TH; Bottom side - for TP C = Bottom side - Y cable, for TH + TP D = Top side - for the 2nd column; Bottom side - for TH & TP; direct cut operation with 2 columns E = Top side - for the 2nd column & TH; Bottom side - for TP; direct cut operation with 2 columns		
<b>Special Functions for Spindle Sub-assembly</b>	0 = Without (Standard)      1 = Safety nut		
<b>Functions for Limit Switches</b> <a href="#">See page 11</a>	1 = Two switches at full retracted / extended positions to cut current		
<b>IP Rating</b>	1 = Without	2 = IPX4	3 = IPX6
<b>Output Signals</b>	0 = Without		
<b>Connector</b> <a href="#">See page 11</a>	C = Direct cut, water proof, anti-pull		
<b>Cable Length (mm)</b> <a href="#">See page 12</a>	B = Cable exit #B, L2 = L3 = 100 C = Cable exit #C, L1 = L2 = L3 = 100 D = Cable exit #D, L2 = L3 = L4 = 100 E = Cable exit #E, L2 = L3 = L4 = 100		
<b>Color</b>	1 = Black (With black cable set) 2 = Matte silver (With 428C color cable set) 3 = Matte silver (With black cable set)		
<b>Tubes Direction</b> <a href="#">See page 12</a>	0 = Thinner on top      1 = Wider on top		
<b>Grounding Function</b>	0 = Without      1 = With		

## Note

**1** The TL3 is designed especially for push applications, not suitable for pull applications.

## Retracted Length (mm)

1. Minimum retracted length needs to  $\geq A+B+C$

A. Load (N)	1000	2000	4000
	Stroke / 2+150 or Stroke / 2+220		

## Note

1 Different retracted length is relative to different bending moment, [See page 3.](#)

## B. Cable Exit

CODE	Top End Socket	Bottom Side Cable	Top Side Cable	Top + Bottom side cable	Direct Cut
1	-	-	-	-	-
2	-	-	-	-	-
3	-	-	+15	-	-
B	-	-	-	+35	-
B, D, E	-	-	-	-	+35
C	-	-	-	-	-

## C. When with POT (When without POT, C = 0)


Cable Exit Code	Top End Socket	Bottom Side Cable	Top Side Cable
1	+40	-	-
2	-	+40	-
3	-	-	+40

## Note


1 If met  $S > 700\text{mm}$  &  $RL = S/2 + 150$  & Bottom side cable conditions at the same time, the minimum retracted length needs to  $+20\text{mm}$ .

## Cable Exit


1 = Top end socket




2 = Bottom side cable

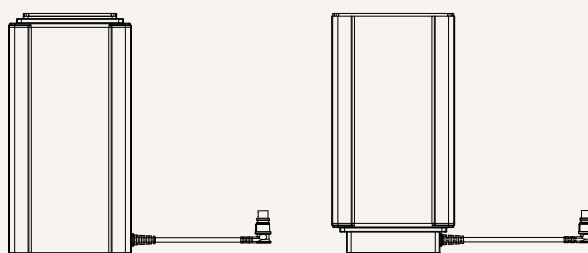

3 = Top side cable




4 = Top (to TC) + Bottom (to TH) side cable

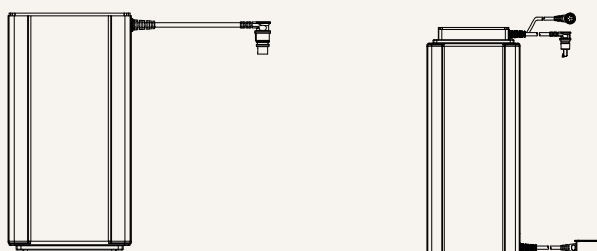


Cable Exit


B = Top side - for TH; Bottom side - for TP




C = Bottom side - Y cable, for TH + TP



D = Top side - for the 2nd column; Bottom side - for TH & TP; direct cut operation with 2 columns



E = Top side - for the 2nd column & TH; Bottom side - for TP; direct cut operation with 2 columns




Functions for Limit Switches

Wire Definitions


CODE	Pin					
	1 (Green)	2 (Red)	3 (White)	4 (Black)	5 (Yellow)	6 (Blue)
1	extend (VDC+)	N/A	N/A	N/A	retract (VDC+)	N/A
3	extend (VDC+)	common	upper limit switch	N/A	retract (VDC+)	lower limit switch

Connector


1 = DIN 6P, socket (Top end socket)



1 = DIN 6P, 90° plug (Side cable)




2 = Tinned leads




2 = DIN 6P, socket, with Anti-pull buckle




3 = Molex 6P, 90° plug




F = DIN 6P, 180° plug




G = Molex 8P 90° plug




H = Molex 8P 180° plug




C = Direct cut, water proof, anti-pull



For TH:  
long DIN 5P (Pin array 240°),  
180° socket (with anti-pull clip)




For TP:  
long DIN 5P (Pin array 240°),  
180° plug (with O-ring)




For Column 2:  
long DIN 6P (Pin array 240°),  
180° plug (with anti-pull clip)

Cable Length (mm)

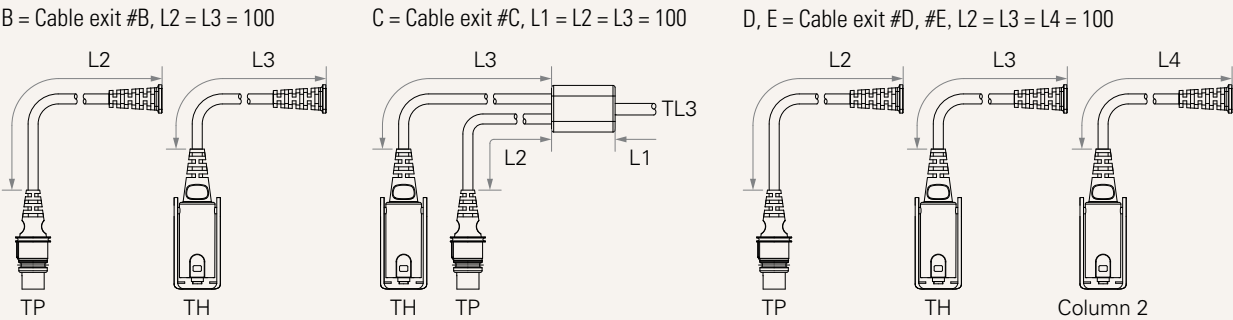

Tubes Direction

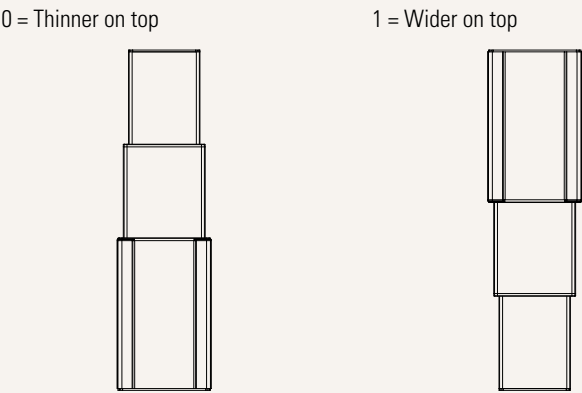

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.