

TC15F

series



Product Segments

• Ergo Motion


The TC15F control box is specifically designed for a variety of ergonomic height-adjustable applications. Incorporating solid-state circuitry, the TC15F provides seamless and quiet operation, eliminating any relay clicks. Experience instantaneous button responses, delivering an exceptional user experience with smooth, uninterrupted, movements. Elevate your workspace with the TC15F for enhanced operational precision and unparalleled ergonomic performance.

General Features

| | |
|--|---|
| Number of motors | 1~2 |
| Number of controls | 1 |
| Max. output | 32V DC, 12A |
| Back-up battery | External battery |
| Options | Supports built-in t-touch / Bluetooth and external battery |
| Input Voltage | 100~240V AC (SMPS) |
| Built-in transformer type | SMPS |
| Plug support | EU, US, AU, UK, or JP |
| Color | Black |
| Operational temperature range | +5°C~+45°C |
| 0.1W standby power consumption | |
| Compact design for height adjustable desks | |

Drawing

Standard Dimensions
(mm)

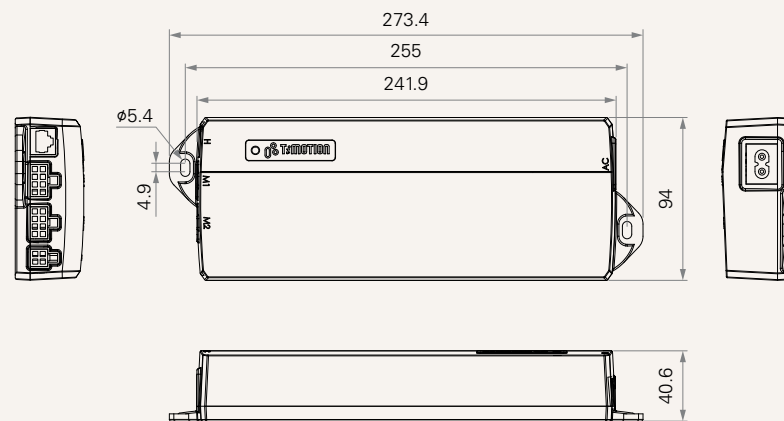

TC15F Ordering Key

TC15F

Version: 20240704-C

| | | | |
|--------------------|--|--------------------------|--|
| Transformer | 8 = SPM-73Q (32V/2.5A, 0.5W standby power, quick start, 100-240V) | | S = SPM-120Q (32V/4.0A, 0.5W standby power, quick start, 100-240V) |
| | L = SPM-73QC (32V/2.5A, 0.1W standby power, quick start, 100-240V) | | W = SPM-400H (12A, 0.1W stand by, 195-264V) |
| | K = SPM-120QC (32V/4.0A + 5V/100mA, 0.1W standby power, quick start, 100-240V) | | Y = SPM-400L (12A, 0.1W stand by, 100-132V) |
| | | | U = SPM-58E (29V/2.0A, 0.15W stand by, 100-240V) |
| Plug | 1 = EU | 3 = AU | 5 = JP |
| | 2 = US, SPT-2 | 4 = UK | |
| Fixiation Type | 1 = Black | 2 = Black, Quick Release | |
| Cable Length (mm) | 1 = Straight, 1500 | 2 = Straight, 2000 | 3 = Straight, 4000 |
| Control Board | 2 = With MCU | | |
| Bluetooth Built-In | 0 = Without | 1 = With | |
| t-touch Built-In | 0 = Without | 1 = With | |
| TBB Port | 0 = Without | 1 = With | |

Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.