


TL26H

series

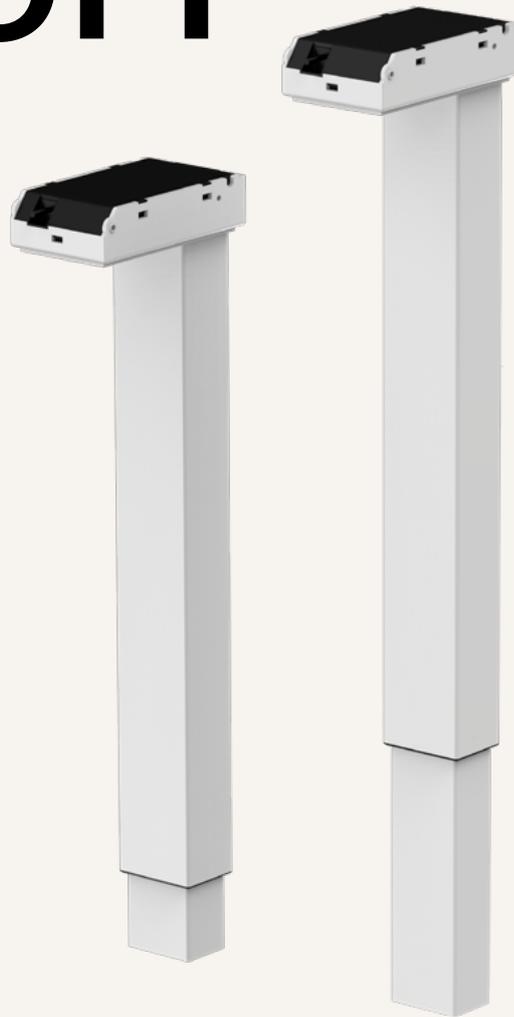

Product Segments

- **Ergo Motion**


TL26H is part of TiMOTION's heavy-duty lifting column series in our Ergo Motion product line. Each TL26H is designed to support up to a 120kg lift capacity, while maintaining smooth and steady movement. This lifting column is ideal for consoles, workbenches, industrial workstations, heavy tabletops, and other applications requiring increased load capacity. Additionally, it is compatible with control boxes within the Ergo Motion and TEK series.

General Features

Max. load	1200N (push)
Max. speed at max. load	22mm/s
Max. speed at no load	28mm/s
Retracted length	Standard (compatible with foot): 645mm Extended (compatible with shoe): 665mm
Dimension of outer tube	80*60mm rectangular
Stages	2-stage
Stroke	500mm
Output signals	Hall sensors
Voltage	24V DC
Color	Black, white, grey, or special colors
With motor house	

Drawing

Standard Dimensions
(mm)

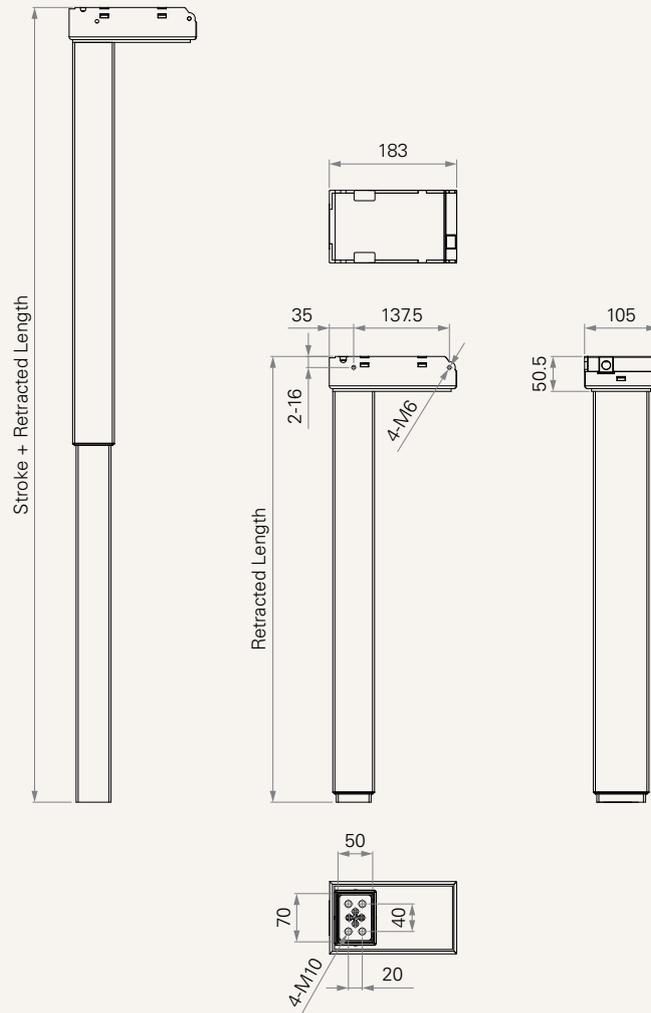

Load and Speed

CODE	Load (N)	Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
			No Load 29V DC	With Load 29V DC	No Load 29V DC	With Load 29V DC
Motor Speed (5200RPM)						
D	1200	1200	2.2	6.0	28.0	22.0


Note

- 1 Above self lock, typical current and typical speed performance are tested with Timotion control boxes.
- 2 Parameters above are from tested average, please refer to approval drawing for final value.


Performance Data (24V DC Motor)

Motor Speed (5200RPM)

Speed vs. Load

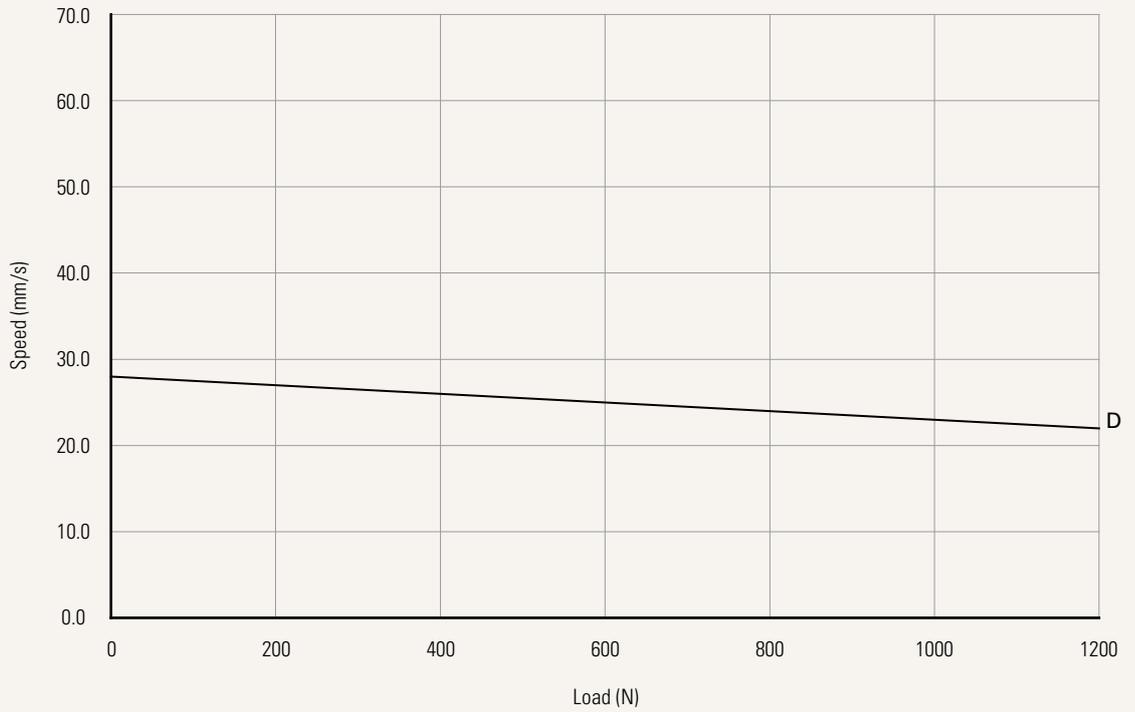

Current vs. Load

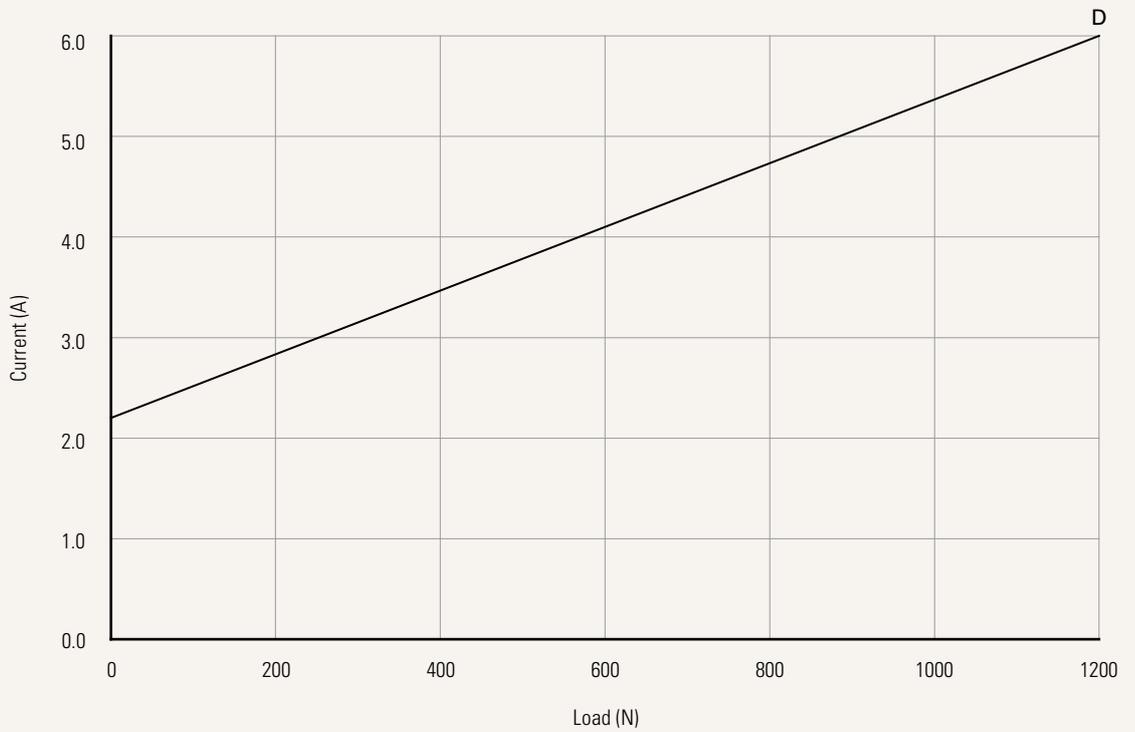

Note

1 The performance data in the curve charts shows theoretical value.

Appearance of Motor House	C = TiMOTION standard			
Voltage	2 = 24V DC			
Load and Speed	See page 2			
Stroke & Retracted Length (mm)	See page 5			
Color	1 = Black, RAL 9005	2 = White, RAL 9016	3 = Grey, RAL 9006	4 = Special grey, RAL 9022
Wiper Color	1 = Black	2 = White	3 = Grey	4 = Matte black
Bracket	0 = Without			
Buttom Plate Type	1 = M10			
Buttom Plate Height	1 = Standard			
Output Signals	2 = Hall sensor * 2			
Connector	1 = DIN 6P, 90° plug		F = Molex 8P, 90° plug, without anti-clip, for TC22 / TC23	
See page 5	E = Molex 8P, 180° plug, standard			
Cable Length (mm)	1 = Straight, 500	3 = Straight, 1000	4 = Straight, 1500	

Note

¹ The TL is designed especially for push applications, not suitable for pull applications.

Stroke & Retracted Length (mm)


Foot Assembly	Stroke & Retracted Length
	Standard
Standard, for Foot (Excluding Foot)	500 / 645
Extended Outer Tube for Shoe (Excluding Shoe)	500 / 665

Note


1 Only specific TEK could be with the shoes, please refer to TEK speccode

Foot Assembly

Standard, for foot (excluding foot)

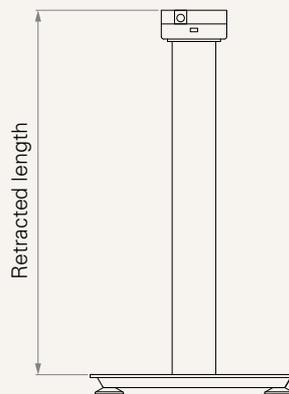


Extended outer tube for shoe (excluding shoe)

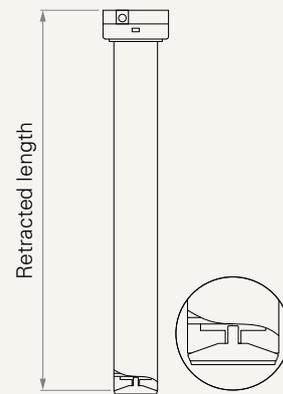


Connector


1 = DIN 6P, 90° plug



E = Molex 8P, 180° plug, standard



F = Molex 8P, 90° plug, without anti-clip, for TC22 / TC23



Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.