

TL33KR

series



Product Segments

• Ergo Motion


TiMOTION's TL33KR series is a high-value, cost-effective lift column designed specifically for ergonomic desks, work tables, and other height-adjustable systems. Paired with compatible TC series control boxes and TH/TDH series controls, TL33KR series lift columns easily support synchronous movement providing quiet and smooth operation of the work surface. All TiMOTION's Ergo Motion TC series control boxes are economically designed with standby power options of less than 0.1W to reduce power consumption. Our wide range of columns offer a variety of solutions to satisfy the most challenging project requirements for demanding work environments. The TL33KR has a rectangular three-stage telescopic profile, designed with a wide-top, and narrow-bottom.

General Features

Max. load	600N (push)
Max. speed at max. load	32mm/s
Max. speed at no load	45mm/s
Retracted length	590 / 560 (M) / 520 (S)mm
Dimension of outer tube	83*53mm rectangular
Stages	3-stage, upside down
Stroke	650 / 660 (M, S)mm
Output signals	Hall sensors
Voltage	24V DC
Color	Black, white, grey, or special grey
With motor house	

Drawing

Standard Dimensions
(mm)

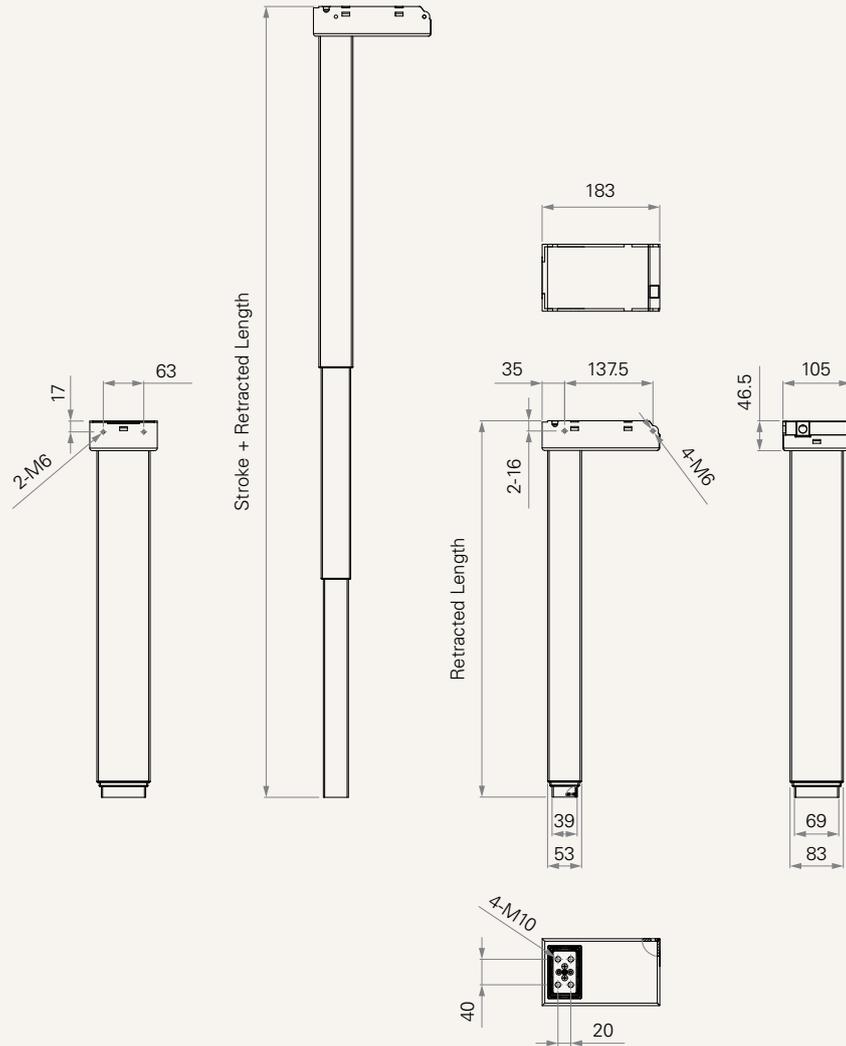

Load and Speed

CODE	Load (N)	Self Locking Force (N)	Typical Current (A)		Typical Speed (mm/s)	
	Push		No Load 29V DC	With Load 29V DC	No Load 29V DC	With Load 29V DC
Motor Speed (5200RPM)						
D	600	600	2.5	6.0	45.0	32.0


Note

- 1 Above self lock, typical current and typical speed performance are tested with Timotion control boxes.
- 2 Parameters above are from tested average, please refer to approval drawing for final value.


Performance Data (24V DC Motor)

Motor Speed (5200RPM)

Speed vs. Load

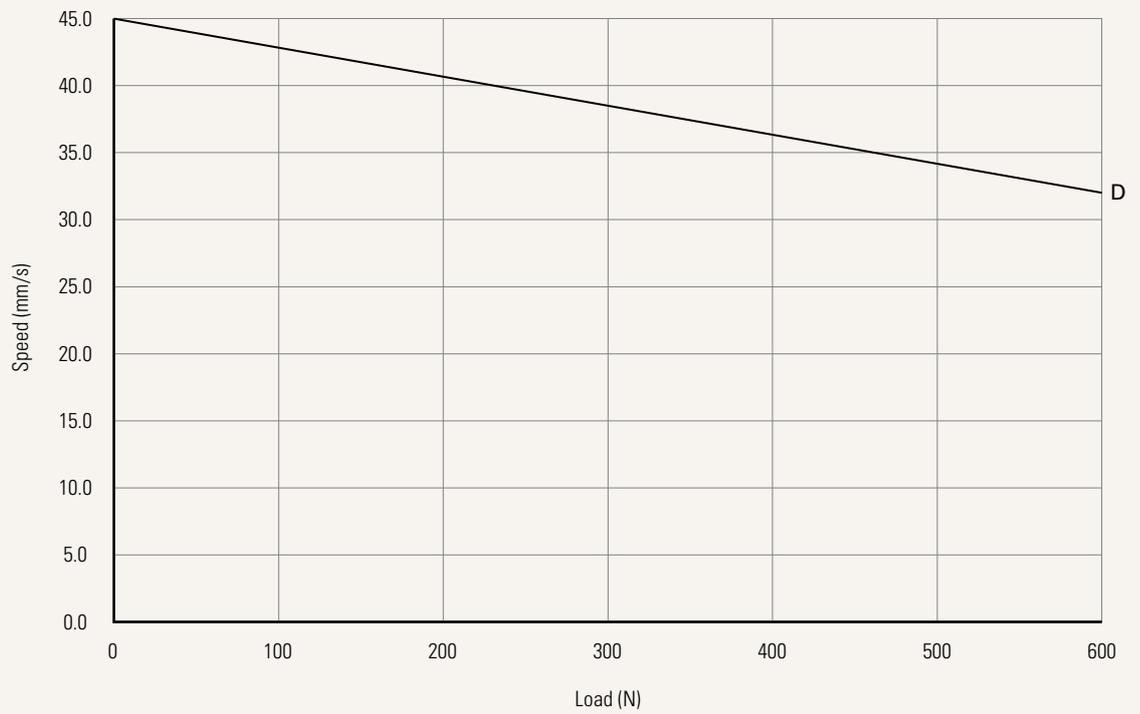

Current vs. Load

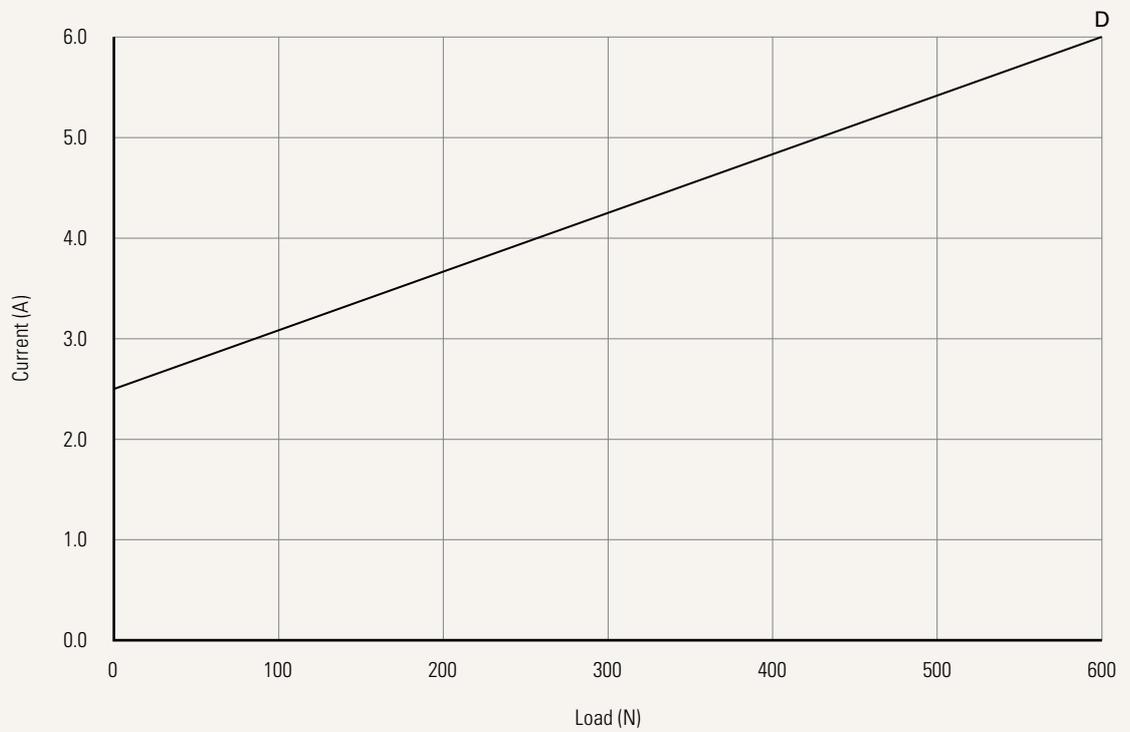

Appearance of Motor House	C = TiMOTION standard			
Voltage	2 = 24V DC			
Load and Speed	See page 2			
Stroke & Retracted Length (mm)	See page 5			
Color	1 = Black, RAL 9005	2 = White, RAL 9016	3 = Grey, RAL 9006	4 = Special grey, RAL 9022
Wiper Color	1 = Black	2 = White	3 = Grey	4 = Matte black
Bracket	0 = Without			
Bottom Plate Type	1 = M10	2 = M6		
Bottom Plate Height	1 = Standard		2 = Extended outer tube for shoe	
Output Signals	2 = Hall sensor * 2			
Connector	1 = DIN 6P, 90° plug		F = Molex 8P, 90°plug, without anti-clip, for TC22/TC23	
See page 5	E = Molex 8P, 180°plug, standard			
Cable Length (mm)	1 = Straight, 500	3 = Straight, 1000	4 = Straight, 1500	

Note

¹ The TL is designed especially for push applications, not suitable for pull applications.

Stroke & Retracted Length (mm)


Foot Assembly	Stroke & Retracted Length		
	Standard	M	S
Standard, for Foot (Excluding Foot)	650 / 590	660 / 560	660 / 520

Note

1 Only specific TEK could be with the shoes, please refer to TEK speccode


Foot Assembly

Standard, for foot (excluding foot)

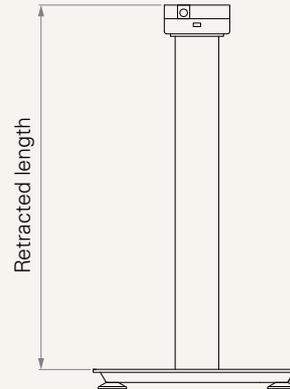


Connector


1 = DIN 6P, 90° plug



E = Molex 8P, 180° plug, standard

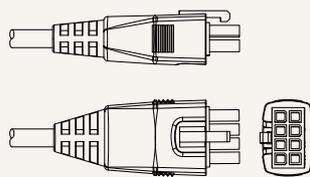

F = Molex 8P, 90° plug, without anti-clip, for TC22/TC23



Terms of Use

The user is responsible for determining the suitability of TiMOTION products for a specific application. TiMOTION products are subject to change without prior notice.